


Non-Powered Convertible Air Foam Therapy System

- ◊ Non-powered mattress replacement can be used without a control unit attached
- ◊ One-inch viscoelastic topper enhances pressure redistribution and patient comfort
- ◊ The P.R.O.Matt Plus converts to provide alternating pressure therapy with attachment of optional control unit as needed
- ◊ In non-powered mode, four-zone system (head, shoulder, torso and foot) with inner air core reproduces the surface pressure profile of a therapeutic low air loss mattress
- ◊ P.R.O. Technology valve maintains optimal air pressures in each therapy zone for superior pressure redistribution regardless of patient weight and profile

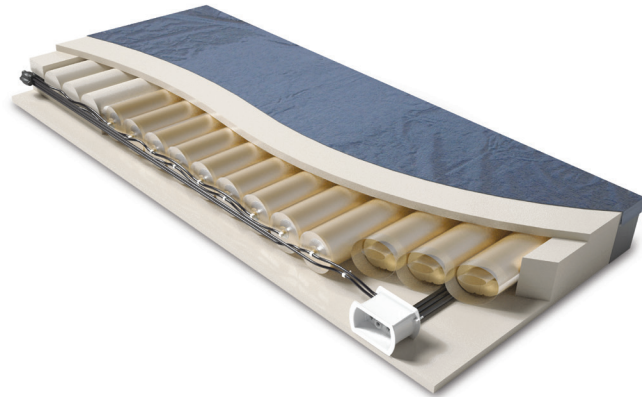

More Features and Benefits

- ◊ Surrounding firm perimeter provides stability and patient safety by eliminating gaps between bed frames and siderails or assist devices
 - Provides added patient security when optional raised side walls not used
 - Incorporates cut-out which facilitates ingress/egress
- ◊ Self-calibrating design needs no manual inflation
- ◊ Waterproof nylon therapy cover standard and provides low friction, low shear surface
- ◊ Raised sidewalls and stretch cover available as additional options
- ◊ Maintenance-free except for normal surface cleaning



Technical Specifications

Maximum Weight Capacity¹

500 lbs

Mattress Dimensions

36" W x 80" L x 7" D

36" W x 84" L x 7" D

42" W x 80" L x 7" D

Meets Flammability Standards

TB 117, TB 129, 16 CFR 1633 and BFD IX-1

Warranty

Mattress: Five-years, non-prorated; Cover: One-year

Environmental Conditions

Operating Conditions

Ambient Temperature: +10°C to + 40°C

Relative Humidity: Non-Condensing

Storage and Shipping Conditions

Ambient Temperature: +10°C to + 40°C

Relative Humidity: Non-Condensing

¹Mattress weight capacity only; total weight must not exceed bed frame manufacturer's specified load capacity. Joerns reserves the right to change specifications without notice.

Optional Control Unit Specifications

Feature	ES2 Control Unit	CBC Control Unit
Dimensions	7.5" W x 12.25" H x 5.5" D	11.18" W x 5.6" H x 3.5" D
Weight	7 lbs.	4.2 lbs.
Comfort Settings	5	10
Cycle Times	5, 10, 15 minutes	10 minutes
Modes of Operation	3 - Autofirm, Alternating and Therapy	2 - Alternate and Static
Lockout	Yes	No
Warranty	One-year	One-year
Agency Approvals	UL Classified: UL 60601-1 CAN/CSA C22.2 No. 60601-1	UL Classified: UL 60601-1 CAN/CSA C22.2 No. 60601-1
Electrical Specifications	120V AC, 60Hz, 0.6A	120V AC, 60Hz, 0.6A

Clinical Indications

Pressure Redistribution

Stage I-IV Pressure Ulcers²; Rehabilitation; Burns; Neurology; Dermatology; Amputations

²In the non-powered mode, the P.R.O. Matt Plus design allows the provision of optimal interface pressures through controlled air cell inflation for at-risk patients in the prevention and treatment of Stage I and II pressure ulcers, and treatment of uncomplicated Stage III and IV ulcers in patients with multiple turning surfaces. For Stage III and/or Stage IV treatment, care staff should be able to position the patient off of the pressure wound in at least 2 positions.

In the powered alternating pressure mode, the P.R.O. Matt Plus adds the benefit of cyclic offloading for advanced treatment of uncomplicated Stage III or IV pressure ulcers for patients where such therapy may improve pressure redistribution and circulation. In all cases, Joerns clinical indications are guidelines and should be taken only as recommendations for consideration during individual patient assessment by the clinician.

Pain Management

AIDS; Arthritis; Oncology



■ DESIGN ■ PREVENTION ■ HEALING

Post Acute 800.826.0270 • Acute and Homecare 888.221.8461 • Government 800.966.6662

©2013 Joerns Healthcare • 6220179 RevJ • 13-2846

Joerns.com